

Eco i5

1200 x 1000

CPP 873



Light-weight plastic pallet for loads up to 600 kg in the high rack

An outstanding weight/load ratio makes the Eco i5 a reliable, cost-effective carrier for medium-size loads. Due to optimal distribution of plastic into the structure of the pallet, the Eco i5 bears up to 600 kg in high racks, despite its low weight. The monoblock pallet is available with three or five runners.

Bottom support



> 3 runners (3R)




> 5 runners (5R)

Deck options




> open deck (OD)



Tracking of shipment and goods by optional labels.



Rounded edges protect pallet against damage.

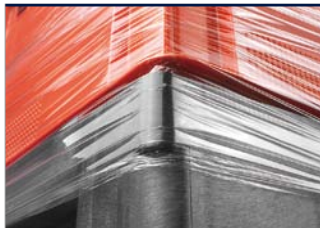

Special design allows secure shrink wrapping.




Safety rims prevent slipping in the stack.

Technical data*1

	Previous name	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]	
					Static	Dynamic	Racking	HDPE	PO
Eco i5 (OD-3R)	CPP 873	3 runners	open	1200 x 1000 x 150	8000	2500	600	12,5	13,5
Eco i5 (OD-5R)	CPP 875	5 runners				3000		13,0	14,5

Entry: 4 ways | Nesting height: - | Safety rim: 5 mm (optional without)

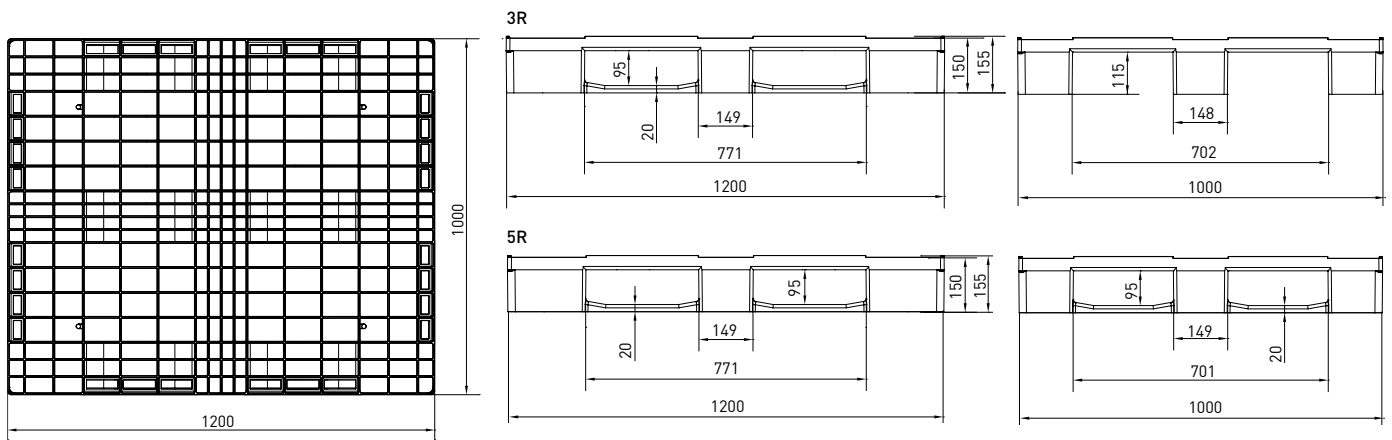

nominal sizes in mm

Options

- Color: (other colors on request*3) > Individual marking*3
- Anti-slip: safety rim
- ESD prevention: -



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.