# Endur S7

# I 1200 x 1200





# Robust plastic pallet in special size 1200 x 1200 mm

The Endur S7 is ideal for high-rotation usage such as open or closed pools. Because of the robust design and its special size also big bags (FIBC) can be handled and stored in racks safely. Six modular units (600 x 400 mm) per layer can be transported. Besides the 3 runners version, the pallet is available with 6 runners and can therefore be used for block stacking. The pallet comes with an open or closed upper deck.

#### **Bottom support**



> 3 runners (3R)



> 6 runners (6R)

#### **Deck options**



> open deck (OD)



> closed deck (CD)



anti-slip strips (optional)





Available with up to 12 anti-slip pads

## Technical data\*1

	Previous name		Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]	
		Bottom support			Static	Dynamic	Racking	PP	P0*4
Endur S7 (OD-3R)	-		open	1200 x 1200 x 165	5000	2500	1250	24,0	29,0
Endur S7 (CD-3R)	-	3 runners	closed					24,5	29,5
Endur S7 (OD-6R)	-	,	open					27,0	32,5
Endur S7 (CD-6R)	-	6 runners	closed					27,5	33,0

Entry: 4 ways | Nesting height: - | Safety rim: 7 mm (optional without)



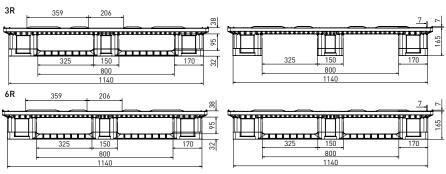

nominal sizes in mm

## Options

Anti-slip:

safety rim, strips on deck, grommets under

deck

ESD prevention: anti-static, conductive

- > Individual marking\*3
- > RFID transponders







<sup>\*</sup>¹ Figures can vary depending on the raw material used and options applied. \*² Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. \*³ Minimum quantity required \*⁴ Available on demand - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.