

Endur US7

1219 x 1016

CPP 736 | CPP 736-M | CPP 736c | CPP 736c-M



Strong 6-runner plastic pallet in imperial units 48" x 40"

The Endur US7's cruciform perimeter base and robust design make it especially suitable for block stacking. The closed-deck version prevents loose material from trickling through and creates fewer pressure points on the cargo. Additional metal reinforcement in the skids increases the permissible load in high racks to 1250 kg.

Bottom support



> 6 runners (6R)



> 6 runners metalreinforced (6R-M)

Deck options



> open deck (OD)



> closed deck (CD)



Dry bulk goods can not trickle through.





As option: metal reinforced runners

Technical data*1

| | Previous name | Bottom support | Top deck | Dimensions [mm] | Load capacities*2 [kg] | | | Weight [kg] | |
|---------------------|---------------|----------------|----------|-----------------|------------------------|---------|---------|-------------|------|
| | | | | | Static | Dynamic | Racking | HDPE | PO |
| Endur US7 (OD-6R) | CPP 736 | 6 runners | open | 1219x1016x145 | 6400 | 2000 | 1000 | 18,0 | 20,0 |
| Endur US7 (CD-6R-M) | CPP 736-M | | closed | | | | 1250 | 22,0 | 23,5 |
| Endur US7 (OD-6R) | CPP 736c | | open | | | | 1000 | 19,0 | 21,0 |
| Endur US7 (CD-6R-M) | CPP 736c-M | | closed | | | | 1250 | 23,0 | 24,5 |

Entry: 4 ways | Nesting height: - | Safety rim: -

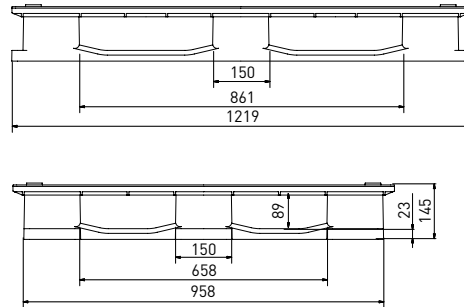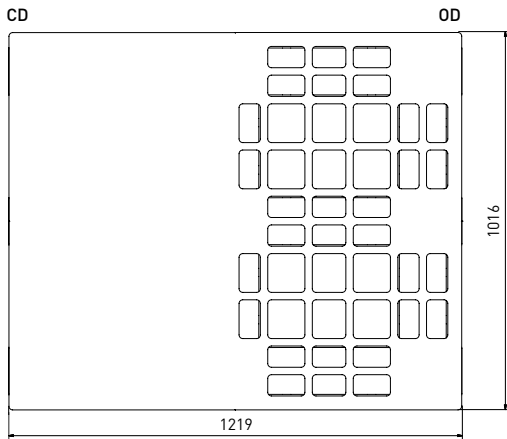

nominal sizes in mm

Options

Color: (other colors on request*3)

> Individual marking*3

Anti-slip: -

ESD prevention: -



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.