

# Nest E5

1200 x 800

CPP 230 | CPP 233



### Nestable euro-size plastic pallet for medium loads

This robust load carrier is the universal Euro-size pallet for medium loads. It comes in two versions. In the 9-foot nestable version, it saves floor space and transport costs. The version with 3 runners can be used with conveyor technology and bears up to 500 kg in high racks.

### Bottom support



> 9 feet (9F)



> 3 runners (3R)

### Deck options



> open deck (OD)



Available as ESD pallet ...



... for transport of electrostatic-sensitive devices.




Nestable CPP plastic pallets require less floor space.

## Technical data\*1

	Previous name	Bottom support	Top deck	Dimensions [mm]	Load capacities*2 [kg]			Weight [kg]	
					Static	Dynamic	Racking	HDPE	PO
Nest E5 (OD-9F)	CPP 230	9 feet, nestable	open	1200 x 800 x 140	3200	1200	—	8,0	9,0
Nest E5 (OD-3R)	CPP 233	3 runners		1200 x 800 x 150	6400	1600	500	11,5	12,5

Entry: 4 ways | Nesting height: 44 mm | Safety rim: 6 mm (optional without)

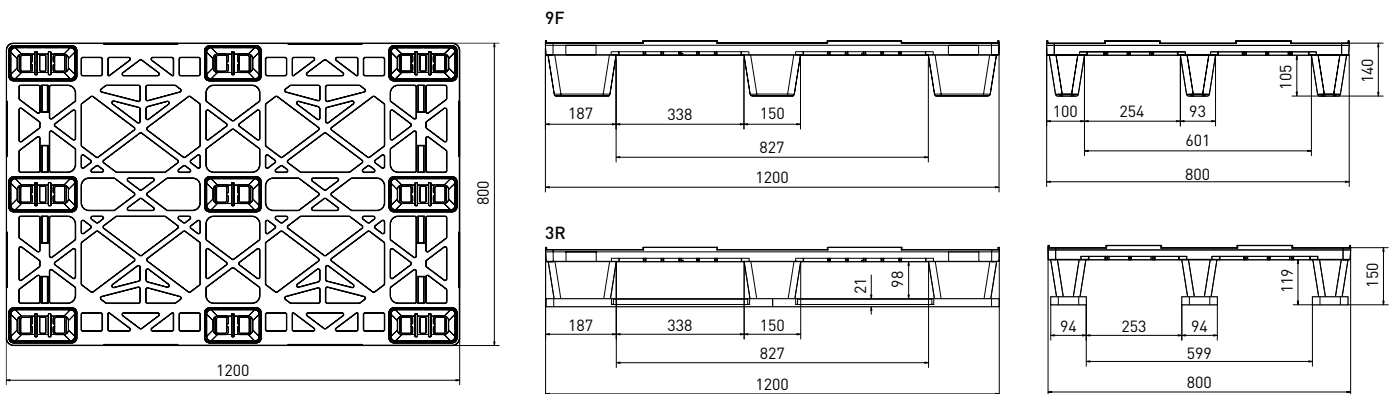

nominal sizes in mm

## Options

- Color:  [other colors on request\*3] > Individual marking\*3
- Anti-slip: safety rim, grommets on deck, grommets under deck
- ESD prevention: anti-static, ESD



\*1 Figures can vary depending on the raw material used and options applied. \*2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. \*3 Minimum quantity required - PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.